

UBTik™ Dual-Band MIMO MikroTik Access Point for Ubiquiti Antennas

MW-ODE-411AH-UBTIK


Full Featured Design

POWERED BY MIKROTIK - ANTENNA SYSTEM

MaxxWave introduces a MikroTik Access Point to work with Ubiquiti antennas. UBTik™ Dual-Band MIMO unique design enables a MikroTik RouterBOARD RB/411AH to mount onto any Ubiquiti antenna, taking advantage of one of the best carrier-class antenna systems available on the market. Simply Clip-on, Plug-in and Play, and you instantly have a MikroTik Point-to-Point or Point-to-Multi-Point system.

MORE CHOICES

UBTik™ products make it possible for a MikroTik user to easily connect up with any Ubiquiti antenna. UBTik™ products are compatible with all Ubiquiti AirMax Sector, Omni and Dish antennas.

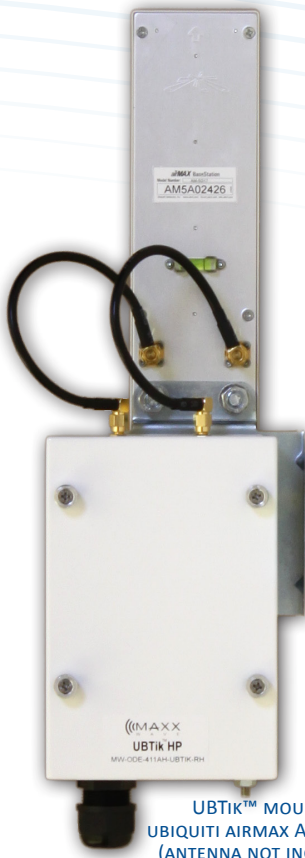

UBTik™ MOUNTED TO
UBIQUITI AIRMAX ANTENNA
(ANTENNA NOT INCLUDED)



UBTik™ MOUNTED TO
UBIQUITI ROCKETDISH
(ROCKETDISH NOT INCLUDED)

KEY PRODUCT BENEFITS:

- Dual Band 2.4GHz and 5.875GHz
- MIMO
- Easily clips onto any Ubiquiti Antenna
- Weatherproof NEMA 4 Enclosure
- 680MHz Network Processor
- 320mW Radio
- Up to 300Mbps



UBIQUITI COMPATIBLE ANTENNAS:

- AirMax Sector Antennas
AM-2G15
AM-2G16
AM-5G16
AM-5G17
AM-5G19
AM-5G20
- AirMax Omni Antennas
AMO-2G10
AMO-2G13
AMO-5G10
AMO-5G13
- RocketDish Antennas
RD-2G24
RD-5G30
RD-5G34



UBTIK™ PRODUCTS AVAILABLE:

- Dual Band (2.4 + 5.8GHz) MIMO
SKU: MW-ODE-411AH-UBTIK
- 5.875GHz Gigabit MIMO
SKU: MW-ODE-711GA5-UBTIK
- 2.4GHz High-Power MIMO
SKU: MW-ODE-711UA2-UBTIK



UBTik™ Dual-Band MIMO MikroTik Access Point for Ubiquiti Antennas

Technical Specifications

PRODUCT FEATURES

- CPU: Atheros 680MHz processor
- RAM: 64MB RAM / 64MB NAND
- Ethernet: 1 x 10/100 Auto MDI-X Port
- Wireless: MikroTik R52Hn Dual-band (2.4GHz + 5GHz) 802.11a/b/g/n
- Wireless Output Power: 320mW - 25dBm
- Antenna Connector Type: 2 x RP-SMA

OPERATING SYSTEM

- MikroTik RouterOS version 5
- MikroTik RouterOS Level 4 License

MECHANICAL/ ENVIRONMENTAL

- Form Factor: NEMA 4 Outdoor Sealed Enclosure
- Operating Temp: -25C - +65C
- Chassis Material: Powder Coated Steel
- Dimensions: 50mm (1.97") (H) x 207mm (8.15") (W) x 111.75mm (4.4") (D)
- Weight: .66 kg (1.45 lb)
- Power Requirements: 12-28Vdc, PoE

PACKING LIST

- 1 x UBTik™ Dual-Band MIMO
- 1 x 24Vdc PoE Power Supply with LED Current Indicator
- 2 x MaxxWave Brass Antenna Jumpers

OPTIONAL WIRELESS CARDS

- Ubiquiti SR71-12 (SKU #: SR71-12)
- Ubiquiti SR71-15 (SKU #: SR71-15)
- DBii F52N-Pro (SKU #: F52N-PRO)



BOTTOM VIEW



TOP VIEW



WEB PAGE QR CODE

